(51) International Patent Classification 7 : H04B 7/00	A2	(11) International Publication Number: **WO 00/05825**
		(43) International Publication Date: 3 February 2000 (03.02.00)

(54) Title: RADIO COMMUNICATIONS NETWORK
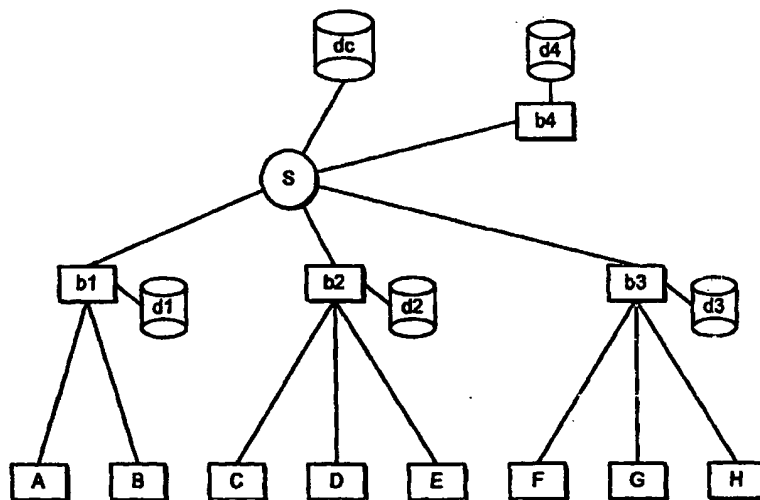
(57) Abstract

A method of and apparatus for connecting calls to mobile stations (A to H) in a radio telecommunications network, such as a private mobile radio system or a cellular telephone system, so as to minimise call set–up delays and communication bottlenecks in the fixed part of the network. A plurality of location data caches (d1 to d4) are provided, each arranged to store location data for selected mobile stations capable of communicating via the network. Each location data cache (d1 to d4) is accessible by one or more base stations (b1 to b4) of the network. In the event that location data is required for a mobile station (A to H) that is not one of the selected mobile stations in a location data cache (d1 to d4) accessible to a base station, the base station (b1 to b4) requests location data from a location data store (dc) containing location data records for all the mobile stations of the network.

RADIO COMMUNICATIONS NETWORK

The present invention relates to a communications
network and to a method of and apparatus for operating
the same. In particular, the invention relates to a
method of and apparatus for connecting calls to mobile
stations in a radio telecommunications network, such as
a private mobile radio system or a cellular telephone
system, so as to minimise call set-up delays and
communication bottlenecks in the fixed part of the
network.

In general, a radio telecommunications network
comprises a plurality of fixed base stations arranged to
communicate with each other via a fixed communications
network. Each base station is arranged to receive and
transmit radio communications from mobile stations in
the vicinity of the base station. The base stations are
geographically distributed so that a mobile station
within the area covered by the network is always in
radio communication range of at least one base station.
Thus, a mobile station is able to make a call by
establishing radio communication with a nearby base
station, which routes the call through the fixed
network. Likewise, a mobile station can receive a call
by radio communication with a nearby base station, the
call having been routed to that base station via the
fixed network. In this way, a mobile station which is
only capable of relatively short range radio
communication can communicate with other mobile stations
anywhere within the coverage area of the network,
because the fixed network acts as an intermediary to
route calls between the mobile stations.

Such a communications network may be connected to
other networks, such as a public telephone system, so
that calls may be made from mobile stations to users of
other networks and vice versa.

- 2 -

The aim of a radio telecommunications network is to allow the mobile stations to roam freely throughout the coverage area of the network while maintaining the ability to make and receive calls at all times. For

5   this reason, it is necessary to maintain constantly updated information as to the location of each mobile station within the network, so that calls can be routed to that station if required. In order to achieve this, each mobile station registers with a base station with

10   which it is in radio communication range. If the mobile station moves out of range of the base station with which it is registered, the mobile station registers with a new base station which is in range. A record is maintained which identifies at any given time the base

15   station of the network which is in radio communication range of a given mobile station, so that calls to that mobile station can be routed to the correct base station.

In many mobile radio systems, it is desirable to

20   provide rapid call set-up both for individual and group calls. Thus, the fixed network should rapidly identify the current location of the called mobile stations so that it can establish the availability of the mobile station or stations, and reserve radio channel and fixed

25   line capacity for the call, in the shortest possible time. The fixed network should be able to handle many such call requests simultaneously without any increase in the call set-up time.

One way for the fixed network to locate a mobile

30   station is to record its current location on a central database which is updated each time the mobile station registers with a new base station. In this way, each time a call set-up request is made, it is only necessary to access the central database to locate the mobile

35   stations that are the intended participants in the call. However, delays will ensue as soon as more than one call request is made at the same time, because of the need to

wait for access to the central database, and, as the
call numbers rise, congestion in the connections leading
to the central database.

Another way to proceed is to use a widely
distributed database, where copies of all the location
information that would be held in a cental database are
stored at every switching unit, or at every base
station. This eases the problem of congestion from call
set-up requests, but introduces the new problem of
having to update every database every time a mobile
station moves to a new base station. Also the cost of
the network is increased by the need to have multiple
copies of a potentially very large database.

Yet another known way to identify the location and
details of a called mobile station is to store this data
in a set of distributed location databases without
duplication, and to employ a mobile station numbering
scheme which incorporates the identity of the relevant
location database as part of the number (the first three
digits of the mobile station's identity, for example).
However, this method places constraints on the available
numbers, is inefficient in the use of the number space,
and is inflexible when it is desired to expand or
reconfigure the system, or merge it with another system,
for example.

In its first aspects, the present invention seeks
to provide an alternative way of tracking the locations
of mobile stations in a radio telecommunications
network.

Viewed from one aspect the invention provides a
radio communications network comprising a plurality of
base stations arranged for wireless communication with a
plurality of mobile stations, a plurality of location
data caches each arranged to store location data for
selected mobile stations capable of communicating via
the network, each data cache accessible by one or more
base stations of the network, and wherein each base

station is arranged to request location data from a
location data store in the event that location data is
required for a mobile station that is not one of the
selected mobile stations in a location data cache

5   accessible to the base station.

Thus, in this aspect of the present invention, when
a base station is required to locate a mobile station,
location data for the mobile station is accessed from
the location data cache. Only if the required location

10   data is unavailable from the location data cache, is the
data accessed from a location data store. In this way,
it is not always necessary for the base station to
obtain location data from the location data store. Thus
the number of requests for location data to the location

15   data store is reduced, and thereby the likelihood of
congestion around the location data store is also
reduced. Furthermore, the retrieval of location data
from the location data cache is generally faster than
the retrieval of location data from the location data

20   store. Moreover, the network of the invention does not
restrict the numbering of mobile stations and allows
flexibility for reconfiguration of the system.

Viewed from a further aspect the invention provides
a method of operating a radio communications network,

25   the network comprising a plurality of base stations
arranged for wireless communication with a plurality of
mobile stations, the method comprising storing location
data for selected mobile stations capable of
communicating via the network at two or more location

30   data caches, each location data cache being accessible
by one or more base stations of the network, storing
location data for all mobile stations capable of
communicating via the network at a location data store
and supplying location data to a base station on request

35   from the location data store in the event that location
data is required by the base station for a mobile
station that is not one of the selected mobile stations

in a location data cache accessible to the base station.

The location data caches may be arranged within the
communications network as desired. Each location data
cache may be associated with and provide location data
to one or more base stations. Each base station
preferably can only access a single location data cache.
A location data cache may be in the same physical
location as a base station or may be remote therefrom
(for example, the location data cache may be provided at
a switching unit or router of the network), although
they are preferably local to the base station or
stations that they serve.

In a particularly preferred embodiment each base
station has its own location data cache, which is
preferably accessible only by that base station.

Thus, viewed from a yet further aspect the
invention provides a base station for a radio
communications network, wherein the base station
comprises a location data cache which is arranged to
store location data for selected mobile stations capable
of communicating via the network, and means for
requesting location data from a location data store in
the event that location data is required for a mobile
station that is not one of the selected mobile stations.

Viewed from another aspect the invention provides a
method of operating a base station of a communication
network, the method comprising storing location data for
selected mobile stations capable of communicating via
the network at the base station and requesting location
data from a location data store in the event that
location data is required by the base station for a
mobile station that is not one of the selected mobile
stations.

The location data caches, particularly where they
are located at each base station, are preferably
accessible by their base station or stations
independently of (i.e. without the need to use) the

fixed communications network linking the base stations, as this reduces further congestion in the fixed communications network.

The selected mobile stations for which location
5   data is stored in a data cache may be selected as desired. They are preferably mobile stations which have previously communicated through the base station or stations associated with the data cache, and most preferably are the mobile stations which have most
10   recently communicated through those base station(s). For example, each time a call is set up, the location of the calling and called mobile stations may be stored in a location data cache associated with the base station through which the call is routed, i.e. the base station
15   serving the calling mobile station and, optionally, also stored in a location data cache associated with the base station serving the called mobile station. In other words, when a mobile station communicates through a base station, its location and the location of any other
20   mobile station it communicates with (e.g. all the mobile stations participating in the call) may be stored in that base station's associated location data cache. This has the advantage that the locations of mobile stations or groups of mobile stations that a particular
25   mobile station regularly communicates with are likely to be stored in the location data cache associated with the base station that the particular mobile station is using.

The total number of selected mobile stations the
30   location data of which is stored in the location data cache should be less than the total number of mobile stations capable of communicating via the network. Thus, the number of mobile stations the location data of which is stored in a location data cache is preferably
35   limited in a predetermined manner. For example, the number of mobile stations for which location data is stored may be limited by the size limit of the location

- 7 -

data cache. For example, they could be the last 10 mobile stations to and/or from which the base station has routed a call. Alternatively, items of location data older than a certain, e.g. predetermined, limit may be deleted from the location data cache. In another alternative, the location data cache can be arranged to store only a predetermined number of location records, with the records being stored, e.g. on first-in, first-out basis. The location data cache is preferably also arranged to keep only one set of location data for each mobile station to optimise storage space and prevent duplication.

The location data stored in the location data cache may be the last known location of a particular mobile station, for example the location of that mobile station when a call was routed to it by the base station.

Additional data for each mobile station may be stored in the location data cache, for example availability information, chronological information relating to the last communication with that mobile station and/or associations between that mobile station and other mobile stations.

Each location data cache may also store the next location of a mobile station when that mobile station has moved from a base station associated with the location data cache. In this way, a trail may be formed which may be followed by a call set-up request. However, if a mobile station moves frequently between calls such a system may become inefficient.

The data stored in the location data cache and in particular the location data of the mobile stations is generally not updated every time the mobile stations move around the network between base stations. It would normally only be updated as and when a mobile station communicates through a base station associated with the location data cache (in which case that location data cache would add the mobile station to its list of

- 8 -

location data, possibly replacing the oldest existing
location data with it).

The location data store in general contains a
location data record for each mobile station capable of
5   communicating with the network which is updated with the
location of that mobile station each time the mobile
station registers with a new base station. The location
data store may be a central database containing location
data records for all mobile stations in the network, and
10   accessible by all base stations.

In a preferred arrangement, however, the overall
location data store is in a distributed form, i.e. a
plurality of location data stores are provided, with
each location data store containing a location data
15   record for at least one, but less than all mobile
stations capable of using the network. This arrangement
should be such that a location data record for each
mobile station capable of using the network is stored,
preferably only once, in the network. In this
20   arrangement, the location data stores are distributed
throughout the network, which means that requests to the
location data stores by base stations for location data
are also distributed around the communication links of
the network, reducing bottlenecks. Furthermore,
25   communications from base stations to the location data
stores when a mobile station registers with a base
station are also distributed. An index data store
containing index data associating each mobile station
with a location data store containing the location data
30   record for that mobile station is preferably also
provided, to facilitate locating of the distributed
location data records of the mobile stations.

Thus, viewed from a further aspect the present
invention provides a radio communications network
35   comprising:

a plurality of base stations arranged for wireless
communication with a plurality of mobile stations;

a plurality of location data stores, each location
data store containing a location data record for at
least one, but less than all mobile stations capable of
using the network; and

5   an index data store containing index data
associating each mobile station with a location data
store containing the location data record for that
mobile station.

Accordingly, a centralised store of all location
10   data records, and the associated bottlenecks, is
prevented, as is the necessity to maintain several
copies of a single location database.

Viewed from a yet further aspect the present
invention provides a method of operating a communication
15   network, the network comprising a plurality of base
stations arranged for wireless communication with a
plurality of mobile stations, the method comprising:

providing a plurality of location data stores, each
location data store containing a location data record
20   for at least one, but less than all mobile stations
capable of using the network; and

providing an index data store containing index data
associating each mobile station with a location data
store containing the location data record for that
25   mobile station.

Each location data store may be associated with,
for example in the same physical location as, a base
station of the network. Alternatively, the location
data stores may be located at junctions or switching
30   units of the network. The location data record for each
mobile station should be updated with the new location
of the mobile station whenever the mobile station moves
to a new location (i.e. registers with a new serving
base station).

35   The location data record for a particular mobile
station is advantageously stored in the location data
store which can be accessed most rapidly by the base

station that is used most frequently by that mobile
station, for example a location data store located at
that base station.

The index data store may be a central database
containing index data for all mobile stations in the
network, and accessible by all base stations.
Alternatively, a plurality of index data stores may be
provided each containing index data for all mobile
stations in the network, in order to prevent bottlenecks
at a central store. It will be appreciated that the
index data only changes when a new mobile station is
added to the network or the location data record of an
existing mobile station is moved. Thus, the provision
of multiple copies of the index data store is much less
problematic than the provision of multiple location data
stores containing copies of all location data records as
described above.

As well as the index data store, a plurality of
index data caches arranged to store index data for
selected mobile stations and accessible by the base
stations may be provided, such that each base station
can access such an index data cache. In this
arrangement, when a base station requires index data for
a particular mobile station, for example to connect a
call from another mobile station when the called mobile
station is no longer in range of the called base
station, the base station can attempt to access the
index data in the first instance from its index data
cache. Only in the event that index data for the
required mobile station is unavailable from the index
data cache, does the base station request the index data
from the index data store. In this way, it is not
always necessary for the base station to obtain index
data from the index data store. Thus the number of
requests for index data to the index data store is
reduced, and thereby the likelihood of congestion around
the index data store is also reduced. Furthermore, the

retrieval of index data from the index data cache is
generally faster than the retrieval of index data from
the index data store.

Similarly to the location data caches, each index
data cache may be associated with and provide index data
to one or more base stations. The index data cache may
be in the same physical location as a base station or
may be remote therefrom. For example, the index data
cache may be provided at a switching unit or router of
the network. Preferably each base station has its own
index data cache.

Also similarly to the location data caches, the
selected mobile stations in the index data cache can be
selected as desired, and are preferably mobile stations
which have previously and preferably most recently
communicated through the relevant base station(s). The
selected mobile stations are preferably the stations the
location data of which is stored in the location data
cache for the same base station or stations, and thus
may be selected in the same way. Similarly, the index
data cache is preferably arranged to maintain only a
limited amount of index data. For example, the oldest
item of index data above a certain limit may be deleted
from the index data cache. The index data cache may be
arranged to keep only one set of index data for each
mobile station to optimise storage space and prevent
duplication.

Additional data for each mobile station may be
stored in the index data cache, for example location
data, availability information, chronological
information relating to the last communication with that
mobile station and/or associations between that mobile
station and other mobile stations.

Advantageously, the location data caches and index
data caches are provided in the form of a plurality of
single data caches each performing the role of a
location data cache and an index data cache for the same

selected mobile stations (and for the same base
stations). Most preferably each base station is
provided with a single such data cache. As mentioned
above, the index data changes less frequently than the
5   location data. Thus, even if the location data stored
in the data cache of a base station is incorrect, the
index data will generally remain correct and the
appropriate location data store for that mobile station
can be located from the index data in the data cache,
10 without the need to retrieve index data from an index
data store.

In a particularly preferred embodiment databases
each comprising a location data store, a location data
cache and an index data cache in combination are
15 provided distributed across the network. Most
preferably each base station is provided with a database
which includes a location data store and a data cache
for both index data and location data.

In use, the system of the above aspects of the
20 present invention would typically operate as follows.

When a mobile station (the "calling mobile
station") makes a request to the base station at which
it is registered (the "calling base station") for a call
to another mobile station (the "called mobile station"),
25 and when location data for the called mobile station is
stored in the calling base station's data cache, the
calling base station would normally initially route the
call to the base station (the "called base station")
indicated by the location data stored in the location
30 data cache of the calling base station as the base
station at which the called mobile station is
registered.

In the event that the called mobile station has
moved from the location indicated by the location data
35 stored in the location data cache of the calling base
station when the calling base station attempts to route
the call to the called mobile station, the called base

station at the wrongly indicated location may inform the
calling base station that the called mobile station is
no longer at that location and that the required
location data must be retrieved from the location data
5   store (using an index data store or cache to identify
the relevant location data store, if appropriate).

Alternatively, the called base station could, if it
can, pass the correct location data for the called
mobile station from its own location data cache to the
10   calling base station, or failing that it could retrieve
the correct location data for the called mobile station
from the location data store (again via the index data
store or cache, if appropriate) and then pass it to the
calling base station. In either of these cases, the
15   called base station may route the call information to
the actual location of the called mobile station.

When a base station (the "calling base station")
requests index data from the index data store to carry
out a call request, the index data store may route the
20   call request directly to the location data store
indicated by the index data. Optionally, the location
data store may then route the call request directly to
the base station indicated by the location data (the
"called base station"). Any of the index data store,
25   the location data store or the called base station may
communicate the retrieved index data to the calling base
station.

In a particularly preferred embodiment, a call
request message is forwarded through the communications
30   network (e.g. by the base stations and/or location data
caches or stores) in response to the location data,
rather than the location data simply being returned to
the calling base station. Thus, for example, if a base
station receives a request for a call to a mobile
35   station that is no longer served by that base station,
the base station preferably forwards the call request to
the base station at which the mobile station is located

- 14 -

according to the location data in the data cache of the base station or, if no such location data is stored in the data cache, to the location data store. If the location data store receives a request for a call to a mobile station from a base station it forwards the call request to the base station at which that mobile station is located, according to the location data stored at the location data store. The call request will thus be forwarded to the base station at which the mobile station to be called is located, and this base station can then communicate with the base station that originated the call request (the call request would contain information identifying the originating base station). Furthermore, the originating base station is able to update its location data cache with the new location of the called mobile station.

Viewed from a broad aspect, therefore, the invention provides a radio communications network comprising at least one database storing calling data relating to at least some of the mobile stations capable of communicating via the network, wherein the database is arranged to receive a call request and to forward the call request, supplemented if possible with calling data from the database, in response to the calling data stored in the database in order to progress the call request through the network.

Thus, the database according to this aspect of the invention does not simply return calling data to the source of the call request, for example a base station of the network, but forwards the call request in response to the calling data stored in the database, in order to progress the call request through the network. In this way unnecessary network traffic is reduced, because there are no communications across the network that simply return calling data to a requesting base station. Once the call request reaches the base station (the "called base station") at which the called mobile

- 15 -

station·is located, any calling data that has been
retrieved from the database as the call request was
forwarded through the network can be communicated by the
called base station back to the calling base station.

5   Viewed from a further broad aspect, therefore, the
invention provides a database for a radio communications
network, wherein the database is arranged to store
calling data relating to at least some of the mobile
stations capable of communicating via the network,, to
10   receive a call request and to forward the call request,
supplemented if possible with calling data from the
database, in response to the calling data stored in the
database in order to progress the call request through
the network.

15   Viewed from a yet further broad aspect, therefore,
the invention provides a method of operating a radio
communications network, the method comprising storing
calling data relating to at least some of the mobile
stations capable of communicating via the network in a
20   database, sending a call request to the database and
forwarding the call request, supplemented if possible
with calling data from the database, in response to the
calling data stored in the database in order to progress
the call request through the network.

25   Viewed from a further broad aspect, therefore, the
invention provides a method of operating a database of a
radio communications network, the method comprising
storing in the database calling data relating to at
least some of the mobile stations capable of
30   communicating via the network, receiving a call request
and forwarding the call request, supplemented if
possible with calling data from the database, in
response to the calling data stored in the database in
order to progress the call request through the network.

35   The calling data may be location data as described
above or other data, for example as described above or
hereinafter. The database may be a location data cache

- 16 -

or a location data store as described above or another
database storing information relating to the mobile
stations of the network, for example as described above
or hereinafter.

5   The call request should be forwarded as appropriate
to progress it through the network. For example, if the
database stores location data for a called mobile
station, e.g. it is a location data store, the call
request may be forwarded by the database (location data

10   store) to the base station at which the called mobile
station is located, according to the location data
stored in the database (location data store).

        As a further example, if the database is a location
data cache the call request may be forwarded by the

15   location data cache to the base station at which the
called mobile station is located, according to the
location data stored in the location data cache. If the
location data cache contains no location data for the
called mobile station, the call request may be forwarded

20   to the location data store.

        In the event that a mobile station has moved
through several base stations since it was last called
by a particular base station there may exist an extended
trail of location data stored at successive location

25   data caches, following the path of the mobile station.
This is undesirable, as a call request will follow the
trail and may make many "hops". If an error occurs in
the updating of one of the location data caches, a loop
may be created resulting in a call request going round

30   the trail for ever. Messages sent through the
communications network may therefore include a hop
counter, for example set with an initial predetermined
value when the message is sent and decremented from its
previous value each time the message is passed on to

35   another location. In this case, a message with a zero
hop count, ie. messages that have made a predetermined
number of hops, may be sent to the location data store,

for example via an index data store, thereby cutting
short the trail, and breaking any loops. An advantage
of this mechanism is that in the event of long trails or
loops it is self-correcting because the location data
5   cache of a calling base station is updated with the
called mobile station's current location, cutting short
any extended trail.

Where an index data store or stores are provided,
they are also preferably arranged to forward call
10   requests in the manner described above. For example,
when an index data store receives a call request it may
supplement the call request with the identity of the
location data store storing the location data record for
the called mobile station and forward the call request
15   to that location data store.

Similarly, the index data caches, if provided, are
preferably arranged to forward call requests in the
manner described above. For example the call request
may be forwarded by the index data cache to the location
20   data store containing the location data record for the
called mobile station, according to the index data
stored in the index data cache. If the index data cache
contains no index data for the called mobile station,
the call request may be forwarded to the index data
25   store.

In the present invention, as is often the case in
radio communications systems, plural mobile stations may
be arranged in particular, e.g. predetermined, groups,
such that a call may be made simultaneously to all
30   members of the group. In this case, a location data
record is preferably provided for the group which is
constantly updated with the location of each of the
members of the group. An index data record is also
preferably provided in the index data store for each
35   group.

A group data record for each mobile station may be
provided which indicates the group membership of the

mobile station. The group membership record may be
maintained in the index data store, in the location data
store or in a separate group data store (which may be a
central store or may comprise a plurality of group data
5   stores distributed about the network with appropriate
index data identifying the group data store for the
particular mobile station) or two or more of these
locations.

The location data cache of a base station may be
10   arranged to store location data for selected groups of
mobile stations, in the same way as for individual
mobile stations. Likewise, the index data cache of a
base station may be arranged to store index data for
selected groups of mobile stations, in the same way as
15   for individual mobile stations. The location data
cache, the index data cache or a group data cache may be
arranged to store group data indicating the group
membership of selected mobile stations.

When a mobile station registers with a base
20   station, the location data records for any groups of
which that mobile station is a member, as identified by
the group data of the mobile station, may be updated to
indicate that a member of the appropriate group is
located at that base station. Advantageously, the
25   location data for the group is also transmitted to the
location data cache of each base station at which a
member of the group is currently located (i.e.
registered or in radio communication with), according to
the location data record for the group. In this way, if
30   one mobile station (the "calling mobile station") which
is a member of the group requests a group call to all
other mobile stations in the group (the "called mobile
stations"), the location of each of the called mobile
stations can be accessed quickly from the location data
35   cache of the base station at which the calling mobile
station is located.

Thus, according to a further aspect of the

- 19 -

invention, there is provided a method of operating a
radio communications network, the network comprising a
plurality of base stations arranged for wireless
communication with a plurality of mobile stations, the
5   mobile stations comprising at least one talk group,
wherein each base station with which a member of the
talk group is registered is provided with a continually
updated list of the base stations with which the other
members of the talk group are registered.
10   Some embodiments of the invention will now be
described by way of example only and with reference to
the accompanying drawings, in which:
        Figure 1 illustrates the general arrangement of a
mobile communications network according to the
15   invention; and
        Figures 2 to 4 illustrate the setting-up of calls
across the network of Figure 1.
        Figure 1 shows an example of a radio
telecommunications network according to the invention.
20   The network comprises four fixed radio base stations b1
to b4 which are interconnected by network connections
and a switching unit s which routes messages to their
indicated addresses. This is a simplified
representation of a communications network and other
25   arrangements are possible, for example there may be many
interconnected switches in a large national network, or
the base stations may be interconnected directly.
        The base stations b1 to b4 are each capable of
radio communication with any of the mobile stations A to
30   H authorised to use the network. In Figure 1, mobile
stations A to H are currently registered with base
stations b1, b2 and b3 as shown. Thus, mobile stations
A and B are in radio communication range of base station
b1 and calls to and from either of these mobile stations
35   are routed through the fixed network via base station
b1. Likewise, mobile stations C, D and E are in radio
communication range of base station b2 and mobile

stations F, G and H are in radio communication range of
base station b3. No mobile stations are in range of
base station b4 in the situation shown. Of course, the
mobile stations are free to roam over the geographical
area covered by the telecommunications network moving
from the coverage area of one base station to another.
Thus, Figure 1 represents only an instantaneous view of
the positions of the mobile stations A to H relative to
the base stations b1 to b4.

Each of the base stations b1 to b4 is connected to
a respective database d1 to d4, which contains a data
store and a data cache. The databases are able to
communicate with each other and with base stations over
the network via the base stations to which they are
connected. In general, the databases control the
retrieval of the necessary data relating to the mobile
stations required to set up a call, and the base
stations control communications around the network and
with mobile stations in their range.

A central database dc, which contains an index data
store, is also connected to the network and is remote
from but accessible by all of the base stations b1 to
b4. The databases d1 to d4 and the central database dc
are used to track the location of mobile stations using
the network. The content and operation of the databases
d1 to d4 and the central database dc will be described
in detail in the following.

Each of the databases d1 to d4 contains, in its
data store, location data records, or "home records",
for identities authorised to use the network. An
authorised identity may be an individual mobile station
or a group of mobile stations forming a talk group. A
talk group allows all mobile stations in the group to be
called simultaneously. Every authorised identity has a
single home record, which is stored in one of the
databases. The home record contains all information
that the network requires relating to the particular

identity, possibly with the exception of encryption and
authentication keys, which may need to be stored in a
physically secure location. The home record of a mobile
station is always kept up to date with the location of
5   the mobile station, i.e. the base station at which that
mobile station is registered, and the list of groups of
which the mobile station is a member. Thus, each time a
mobile station moves from one base station to another
the new base station transmits the new location of the
10   mobile station to the home record. In the example shown
in Figure 1, there are four databases, each storing home
records for a portion of the total set of authorised
identities, with no duplication so that only a single
home record exists for each identity. It is not
15   necessary, however, for all databases to store home
records.

        For maximum efficiency, the home record for a
particular mobile station is stored in the database
linked to the base station most frequently used by that
20   mobile station. Home records are preferably well
distributed throughout the communications network to
minimise congestion at the databases when many call
requests occur simultaneously.

        Table 1 shows the home records stored in the
25   database at d4 in the example shown in Figure 1. Item T
in the home records of Table 1 is a group, the members
of which are mobile stations A, B, D and H which are
currently located at base stations b1, b2 and b3
respectively. Mobile stations A and H have their home
30   records at database d4, and thus these home records show
that mobile stations A and H are members of group T.
Mobile station G is a member of groups R, S and V.

Identity	Location	Group Membership
A	b1	T
G	b3	R, S, V
H	b3	T
T	b1	
T	b2	
T	b3	

Table 1: Example of a set of home records stored in the database at d4

The central database dc acts as an index data store and stores index data in the form of an identity index, which contains an entry for each mobile station and talk group identifying the database at which the home record for that mobile station or talk group is stored. Table 2 shows the identity index for the example network shown in the Figure.

It will be appreciated therefore that any base station requiring the location of a particular mobile station can refer to the identity index in the central database dc to find the database storing the home record for that mobile station and obtain the location for the mobile station from the identified database. However, this method of identifying the location of mobile stations is used only as a last resort according to the invention, as is explained below.

Identity	Database
A	d4
B	d3
C	d2
D	d3
E	d1
F	d1
G	d4
H	d4
T	d4

Table 2: Example identity index

As mentioned above, each database d1 to d4
comprises a data cache, as well as the data store that
contains the home records. The data cache contains
details, including status, home record location, group
membership and last known location of a selected number
of the mobile stations, in this embodiment of the mobile
stations which have most recently communicated through
the base station connected with the database (up to the
size limit of the data cache). However, the data cache
is not updated every time a mobile station within the
network changes location.

The greater the size of the data cache, the longer
into the past its records stretch. The optimum size
depends on a number of factors, such as the cost of
cache memory, the number of mobile stations using the
base station, the rate of call throughput etc. It is
particularly important to preserve the records of mobile
stations known to be present (registered) at that base
station, until they move on, or their registration
expires. The data cache provides the base station with
a local store of the last recorded location of any
mobile station that has recently communicated through

the base station, so that the base station can route
calls for that mobile station to the location stored in
the data cache, which may still be the location of the
mobile station.

5   Table 3 shows a possible format for the cache
records in the data cache of database d2 in the example
shown in Figure 1. The data cache includes the location
of the home record for each mobile station, the location
of each mobile station when it last used the base
10   station (b2) connected to the database containing the
data cache, and the date/time of the last time the
mobile station used this base station ("last access").
Since the data cache is of limited length, the records
are arranged so that no mobile station has duplicate
15   entries, i.e. old entries are always replaced by newer
ones, and the oldest records are allowed to drop off the
bottom of the data cache when space is required for new
entries.

          In the exemplified situation depicted in Table 3,
20   mobile stations H and B are not within range of base
station b2 and are therefore assigned the status
"absent". However, these mobile stations have recently
been called, or made calls, through this base station
and so their locations at the time of those calls are
25   recorded in the data cache. At that time, mobile
station B was at base station b4, but, in this example,
unknown to database d2, has since moved to base station
b1, as shown in Figure 1. Mobile station H was at base
station b3 when it communicated via base station b2, and
30   remains at base station b3. Mobile station A was
formerly registered at base station b2 but has since
moved away to a location unknown to database d2.

Identity	Status	Home	Groups	Location	Last access
D	free	d3	T	b2	9803062115
T	free	d4		b1	9803052318
T	free	d4		b2	9803052318
T	free	d4		b3	9803052318
H	absent	d4	T	b3	9803052201
B	absent	d3	T	b4	9803052111
C	busy	d2		b2	9803050901
E	free	d1		b2	9803041015
A	absent	d4	T	?	9803011213

Table 3: Possible format of cache records at database d2

The data cache at database d2 includes details for talk group T which has members at base stations b1, b2 and b3. As the data cache at database d2 is aware that no calls are being made to the members of talk group T located at base station b2, the data cache indicates that all members of group T are "free" to take calls. Mobile station C is engaged in communication via base station b2 and is therefore assigned the status "busy".

As mentioned above, whenever a mobile station roams into the radio communication range of a new base station, the new base station sends a message via the communication network to the database containing the home record for the mobile station, advising the database of the current location of the mobile station, so that the home record can be updated. In the first instance, the new base station will attempt to identify the database storing the home record for the mobile station from the records stored in the data cache of the database connected to that base station. If the mobile station has recently been registered at that base station or if another mobile station has received a call at that base station from the newly arrived mobile

station, the base station will already have a record in
its data cache for the mobile station. If the data
cache contains no record for the mobile station, because
the mobile station has not communicated recently via the
5   base station, the database sends the location updating
message to the central database dc (the index data
store), and the central database then forwards the
location updating message to the location data store
containing the home record for the mobile station. The
10   location data store then sends a confirmation message to
the location data cache associated with the new base
station. The confirmation message contains the identity
of the location data store and may include other
information indicating the call profile and group
15   membership of the mobile station. The location data
cache at the new base station updates its records with
this information. In this way, it is not always
necessary for a base station to communicate with the
central database to register the arrival of a mobile
20   station within its communication range.

Figures 2 to 4 show exchanges of messages which
occur in the following examples. These include local
messages [setup] and [ack] exchanged between the mobile
station, base station and database at a particular base
25   site, and network messages. The network messages
include the following information:

s   source of the message, i.e. the base station
that originated the call set-up request;

30

d   destination of the message, i.e. the called
mobile station;

h   the location of the home record of the called
35   mobile station;

b   the base station at which the called mobile

- 27 -

station is currently registered, or believed
to be registered;

r   the result of a call set-up, e.g. successful
        or unsuccessful; and

n   a hop count which is decremented each time a
        message is forwarded from one database to
        another to limit the possibility of a message
        being endlessly passed around the network
        following a trail of previous locations of a
        mobile station.

If the hop count reaches zero the message is
forwarded to the central database dc so that the correct
current location of the called mobile station can be
reliably included in the message.

As an example of the operation of the network,
suppose that mobile station A, which is currently
registered at base station b1 and whose home record is
stored at database d4, informs base station b1, with a
call set-up message [set-up], that it wishes to call
mobile station D, which is currently registered at base
station b2 and whose home record is at database d3.

The messaging involved in setting up the call is
illustrated in Figure 2, in which the messages are
represented in square brackets.

Initially, base station b1 communicates the call
set-up request to database d1 so that the location of
mobile station D can be retrieved from the data cache at
database d1. However, mobile station D has never
communicated through base station b1 before, so the data
cache at d1 has no information on mobile station D.

Database d1 therefore forwards the call set-up
request to the central database dc via base station b1
and switching unit s. The message to the central
database dc from database d1 includes the source (S) of

- 28 -

the message, ie. database d1, the ultimate destination
(d) of the call request, ie. mobile station D and a hop
count (n), which is decremented each time the message is
forwarded from one database to another. The central

5   database dc notes from the content of the message from
database d1 that base station b1 was unable to locate
mobile station D. Thus, the central database dc
retrieves the location (database d3) of the home record
for mobile station D from the identity index.

10   Rather than simply passing the information as to
the location of the home record of mobile station D back
to base station b1, the central database dc forwards the
call set-up request which now includes the location of
the home record (h) of mobile station D, via base

15   station b3, to database d3, where the home record of
mobile station D is stored.

            Database d3 retrieves the current location (base
station b2) of mobile station D from the home record for
mobile station D and forwards the call set-up request

20   which now includes the current location (b) of mobile
station D, via base station b2, to database d2.
Database d2 checks the current status of mobile station
D in its data cache. If mobile station D is apparently
available (status "free"), database d2 passes the call

25   request back to base station b2. In addition, database
d2 updates its data cache, creating a new record in the
data cache if necessary, with the current location of
mobile station A which information was included in the
call set-up request.

30   Base station b2 checks the actual availability of
mobile station D by contacting it via the air-interface
and reserves a radio channel and line capacity for the
impending call. Base station b2 then sends an
acknowledgement message [ack] back to base station b1,

35   advising it that mobile station D is at base station b2,
and that base station b2 is ready to proceed with the
call. The message also contains the other details of

- 29 -

mobile station D which have been obtained during the
call set-up procedure from the central database, such as
the location (h) of the home record for mobile station D
and in addition the message contains a result (r), e.g.
5   "successful" or "unsuccessful" of the call set-up. Base
station b1 communicates the details of mobile station D
to database d1, which updates its data cache.

Preparation for the call is thus completed in four
messages (b1 to dc, dc to b3, b3 to b2, b2 to b1) across
10   the network's fixed links, excluding local connections
between base stations and databases.

Suppose now that after the first call has been
completed, mobile station A requests a further call to
mobile station D. This exchange of messages is shown in
15   Figure 3. This time, the data cache of database d1
already contains details of mobile station D, including
its most recently known location (base station b2),
which it obtained at the time of the first call.
Database d1 therefore sends the call request directly to
20   database d2, which checks the status of mobile station D
in its data cache and passes the request on to base
station b2. Base station b2 checks the availability of
mobile station D over the air interface and reserves
radio and line channels, before sending the call request
25   back to base station b1 for completion.

This time, the call preparation was completed using
only two fixed-link messages.

Call set-ups between mobile stations A and D can
now proceed according to this second method until either
30   mobile station moves from the base station at which it
is currently registered, or ceases to communicate
through the base stations long enough for its record to
drop off the bottom of the data cache at the base
station at which the other mobile station is registered.
35   The effect of the foregoing is that the first time
a mobile station is called from a particular base
station, the set-up may be relatively slow, but in any

further calls, within a period determined by the size of
the data cache, call set-ups will be faster.

Consider now the case where mobile station D has
roamed to a new base station, for example base station

5   b4. This exchange of messages is shown in Figure 4. As
before, when mobile station A requests a call to mobile
station D, database d1 sends the call set-up request to
database d2, because the data cache at d1 indicates that
mobile station D is at base station b2. Database d2

10   identifies from the status entry in its own data cache
in respect of mobile station D that mobile station D is
no longer present at base station b2 and that the home
record of mobile station D is stored at database d3.
Thus, database d2 forwards the call set-up request

15   straight to database d3.

Database d3 identifies the current location of
mobile station D from the home record for mobile station
D in its data store, which was updated by a message from
base station b4 when mobile station D registered there.

20   Database d3 therefore forwards the call set-up request
on to database d4, the database connected to base
station b4 where mobile station D is currently located.

Database d4 informs base station b4 that mobile
station D is present and base station b4 reserves

25   channel and line capacity for the call and notifies base
station b1 that the call may proceed. Base station b1
advises database d1 of the new location of mobile
station D, and database d1 updates its data cache
accordingly.

30   This exchange takes four fixed-link messages, but
it was not necessary to access the central database dc,
preventing potential congestion around the central
database. If all home records were held centrally at
the central database dc, and database accesses were

35   conducted as transaction pairs, four messages would be
required for every call set-up request, and every call
set-up request would go through the central database dc,

causing congestion both at the central database dc and
in the communication links leading to it.

It has been explained above how calls from an
individual mobile station to another individual mobile
5   station are set up according to the invention. The
setting-up of a group call will now be explained.

In a group call, a mobile station requests a
simultaneous call to a group of mobile stations which
are all members of a "talk group".

10   Suppose mobile station A wishes to call group T,
comprising member mobile stations A, B, D and H. Fixed
stations may also be included in a talk group, but for
simplicity these are omitted from this example. The
call set-up message is sent via the air interface from
15   mobile station A to base station b1 where mobile station
A is currently located. Base station b1 passes the call
request to database d1 which identifies from its data
cache that identity T is a group, as the group
information was loaded into the data cache as soon as
20   mobile station A or B registered at base station b1,
because each of these mobile stations is a member of
group T. Database d1 also identifies from the data
cache that the home record for group T is stored at
database d4. Database d1 therefore passes the call
25   request to database d4.

Database d4 receives the call set-up request from
database d1 and, from the home record of group T,
identifies that members of group T are currently located
at base stations b1, b2 and b3. Database d4 therefore
30   sends the call set-up request straight to databases d1,
d2 and d3. Databases d1, d2 and d3 check the status of
the members of group T in their cache records and pass
the call set-up request to their respective base
stations b1, b2 and b3. Since group calls are generally
35   set up immediately, base stations b2 and b3 reserve
channel and line capacity and base station b1 connects
the call.

- 32 -

This mechanism requires i + n messages across the network, where n is the number of base stations at which members of the group are registered. However, the elapsed time is that of two messages, as the n messages from the database storing the home record for the group are sent simultaneously.

According to a further embodiment, however, an even faster method for setting up group calls is disclosed. This method is most efficient if it is assumed that groups are much less numerous than individual mobile stations, so that the data cache of each database can store the full details, including the location of all group members, for all groups of which one or more members is currently registered at the base station connected to the database, and that group records in the data caches can be updated as member mobile stations move from base station to base station.

A data cache record for a group contains the group identity, a list of base stations at which mobile stations which are members of the group are currently registered and the database at which the home record for the group is stored. This information is also stored in the home record for the group.

Suppose mobile station H, a member of group T, was formerly at base station b2, but now registers at base station b3. Suppose also that the home record for group T is stored at database d4.

When mobile station H registers with base station b3, the base station informs its associated database d3. Database d3 identifies from its data cache that the home record for mobile station H is stored in the database at d2. Database d3 therefore informs database d2 that mobile station H has arrived at base station b3.

Database d2 updates the home record for mobile station H with the current location of mobile station H and identifies that mobile station H is a member of group T. Database d2 therefore locates the home record

of group T (at database d4) either from its data cache
or from the central database dc, and informs database d4
that there is now a member (H) of group T at base
station b3.

5   Database d4 now updates the home record for group T
with this information, and informs all databases which
are connected to base stations at which members of group
T are located that base station b3 must now be included
in the list of locations where members of group T are to
10   be found.

If the departure of mobile station H from base
station b2 leaves base station b2 with no remaining
members of group T, database d2 informs database d4 that
base station b2 is to be removed from the list of
15   locations where members of group T may be found. Again
database d4 advises all databases connected to base
stations where members of group T are currently located
that base station b2 must be removed from their data
cache records of the locations of members of group T.

20   In this way, every base station where a member of
group T is currently located has a full list of every
base station where calls to group T should be sent.
This updating process does not have to be carried out at
the speed of call set-ups, and may be performed as a
25   background operation.

Now consider the example given above of a request
by mobile station A to set up a call to group T. Mobile
station A sends the call request, via the air interface,
to base station b1. Base station b1 sends the request
30   message to database d1, and database d1 identifies the
current locations of all members of group T from its
data cache. Assuming that this is a group call which
does not need acknowledgments, database d1 informs base
station b1 of the locations of the members of group T,
35   and base station b1 contacts all the necessary base
stations.

This call set-up thus proceeds without any

- 34 -

preliminary messages across the fixed network, permitting very fast group call establishment.

It will be seen from the above that according to the embodiments of the invention, the databases and the
5   central database forward call requests across the network until sufficient information has been retrieved from the data caches, the databases and/or the central database to facilitate the call. The databases thus act as intelligent agents routing call requests through the
10   network until the correct call control information can be returned to the call initiator, thereby reducing the size of the burst of messages required to set up a call.

CLAIMS

1.   A radio communications network comprising a
plurality of base stations arranged for wireless
communication with a plurality of mobile stations, a
plurality of location data caches each arranged to store
location data for selected mobile stations capable of
communicating via the network, each data cache being
accessible by one or more base stations of the network,
and wherein each base station is arranged to request
location data from a location data store in the event
that location data is required for a mobile station
that is not one of the selected mobile stations in a
location data cache accessible to the base station.

2.   The radio communications network of claim 1,
wherein each base station can only access a single
location data cache.

3.   The radio communications network of claim 1 or
claim 2, wherein the location data caches are accessible
by their base station or stations independently of the
fixed communications network linking the base stations.

4.   The radio communications network of any one of the
preceding claims, wherein the selected mobile stations
are mobile stations which have previously communicated
through the base station or stations associated with the
location data cache.

5.   The radio communications network of any one of the
preceding claims, wherein location data for mobile
stations which have most recently communicated through
the base station or stations associated with a location
data cache is preferentially stored in that location
data cache.

6.   The radio communications network of any one of the
preceding claims, wherein the selected mobile stations
are mobile stations which have previously participated
in a call routed through the base station or stations.
associated with the location data cache.

7.   The radio communications network of any one of the
preceding claims, wherein when a call is routed through
a base station, location data for both the calling and
called mobile stations is stored in a location data
cache associated with the base station.

8.   The radio communications network of any one of the
preceding claims, wherein the location data cache is
arranged to store only a predetermined number of
location records.

9.   The radio communications network of any one of the
preceding claims, wherein the location data stored in
the location data cache is the last known location of
the selected mobile station.

10.   The radio communications network of any one of the
preceding claims, wherein additional non-location data
for each selected mobile station is stored in the
location data cache.

11.   The radio communications network of any one of the
preceding claims, wherein each location data cache
stores the next location of a selected mobile station
when that mobile station has moved from a base station
associated with the location data cache.

12.   The radio communications network of any one of the
preceding claims, wherein location data for a mobile
station stored in a location data cache is only updated
when that mobile station communicates through a base

station associated with that location data cache.

13. The radio communications network of any one of the preceding claims, wherein the location data store contains a location data record for each mobile station capable of communicating in the network and which is updated with the location of a mobile station each time the mobile station registers with a new base station.

14. The radio communications network of any of the preceding claims, wherein the location data store comprises a plurality of location data stores and each location data store contains a location data record for at least one, but less than all mobile stations capable of using the network.

15. The radio communications network of claim 14, further comprising an index data store containing index data associating each mobile station with a location data store containing the location data record for that mobile station.

16. A radio communications network comprising:
        a plurality of base stations arranged for wireless communication with a plurality of mobile stations;
        a plurality of location data stores, each location data store containing a location data record for at least one, but less than all mobile stations capable of using the network; and
        an index data store containing index data associating each mobile station with a location data store containing the location data record for that mobile station.

17. The radio communications network of claims 15 or claim 16, wherein the index data store is a central database containing index data for all mobile stations

in the network and is accessible by all base·stations.

18. The radio communications network of any one of
claims 15 to 17, having a plurality of index data
stores, each index store containing index data for all
mobile stations in the network.

19. The radio communications network of any one of
claims 15 to 18, further comprising a plurality of index
data caches arranged to store index data for selected
mobile stations and accessible by the base stations,
such that each base station can access such an index
data cache.

20. The radio communications network of claim 19,
wherein each base station has its own index data cache.

21. The radio communications network of claim 19 or
claim 20, wherein the selected mobile stations in the
index data cache are the stations the location data of
which is stored in the location data cache for the same
base station ·or stations.

22. The radio communications network of any of claims
19 to 21, wherein additional data for each mobile
station is stored in the index data cache.

23. The radio communications network of any of claims
19 to 22, wherein each base station is provided with a
single data cache for both index data and location data.

24. The radio communications network of any of claims
19 to 23, wherein each base station is provided with a
database which includes a location data store and a data
cache for both index data and location data.

25. The radio communications network of any one of

claims 14 to 24, wherein each location data store is
associated with a base station of the network.

26. The radio communications network of any one of
claims 14 to 24, wherein the location data stores are
located at junctions or switching units of the network.

27. The radio communications network of any one of the
preceding claims, wherein the network is arranged such
that if a first base station receives a request for a
call to a mobile station that is no longer served by
that base station, the first base station forwards the
call request to the base station at the location
indicated by the location data for the called mobile
station in the location data cache of the first base
station or, if no such location data is stored in the
location data cache associated with the first base
station, forwards the call request to the location data
store.

28. The radio communications network of any one of the
preceding claims, wherein each location data store is
arranged such that if it receives a request for a call
to a mobile station from a base station, it forwards the
call request to the base station at the location
indicated by the location data stored for the mobile
station in the location data store.

29. The radio communications network of any one of the
preceding claims, wherein each index data store is
arranged such that when it receives a call request for a
particular mobile station, it supplements the call
request with the identity of the location data store
storing the location data record for the called mobile
station and forwards the call request to that location
data store.

30.   The radio communications network of any of one of the preceding claims, wherein each and index cache is arranged to forward a call request for a mobile station to the location data store indicated as containing the location data record for the called mobile station by the index data stored in the index data cache, and if the index data cache contains no index data for the called mobile station, to forward the call request to the index data store.

31.   The radio communications network of any one of claims 27 to 30, wherein the network is arranged such that a call request that has been forwarded a predetermined number of times is forwarded to a location data store.

32.   A radio communications network comprising at least one database storing calling data relating to at least some mobile stations capable of communicating via the network, wherein the database is arranged to receive a call request and to forward the call request, supplemented if possible with calling data from the database, in response to the calling data stored in the database in order to progress the call request through the network.

33.   The radio communications network of claim 32 wherein the at least one database is a location data cache and the calling data is location data.

34.   The radio communications network of any one of the preceding claims, wherein some of the mobile stations of the network are arranged in predetermined call groups, each call group including two or more mobile stations, and a location data record is stored for each call group which group location data record contains the location of each of the members of the group.

35. The radio communications network of claim 34,
wherein an index data record is also provided in the
index data store for each call group.

36. The radio communications network of claim 34 or 35
wherein there is further stored for each mobile station
a group data record which indicates the call group
membership of the mobile station.

37. The radio communications network of claim 34, 35 or
36, wherein the network is arranged such that when a
mobile station registers with a base station, the
location data records for all call groups of which that
mobile station is a member are updated to indicate that
a member of the appropriate call group is located at
that base station.

38. The radio communications network of claim 34, 35,
36 or 37, wherein the network is arranged such that when
a mobile station registers with a base station, the
location data for any group of which that mobile station
is a member is transmitted to the location data cache of
each base station where the location data record for the
group indicates that a member of the group is currently
located.

39. A database for a radio communications network,
wherein the database is arranged to store calling data
relating to at least some of the mobile stations capable
of communicating via the network, to receive a call
request and to forward the call request, supplemented if
possible with calling data from the database, in
response to the calling data stored in the database in
order to progress the call request through the network.

40. A base station for a radio communications network,
wherein the base station comprises a location data cache

- 42 -

which is arranged to store location data for selected
mobile stations capable of communicating via the
network, and means for requesting location data from a
location data store in the event that location data is
required for a mobile station that is not one of the
selected mobile stations.

41. A method of operating a radio communications
network, the network comprising a plurality of base
stations arranged for wireless communication with a
plurality of mobile stations, the method comprising
storing location data for selected mobile stations
capable of communicating via the network at two or more
location data caches, each location data cache being
accessible by one or more base stations of the network,
storing location data for all mobile stations capable of
communicating via the network at a location data store
and supplying location data to a base station on request
from the location data store in the event that location
data is required by the base station for a mobile
station that is not one of the selected mobile stations
in a location data cache accessible to the base station.

42. The method of claim 41, wherein each base station
can only access a single location data cache.

43. The method of claim 41 or claim 42, wherein the
location data caches are accessible by their base
station or stations independently of the fixed
communications network linking the base stations.

44. The method of any one of claims 41 to 43, wherein
the selected mobile stations are mobile stations which
have previously communicated through the base station or
stations associated with the location data cache.

45. The method of any one of claims 41 to 44, wherein

location data for mobile stations which have most
recently communicated through the base station or
stations associated with a location data cache is
preferentially stored in that location data cache.

46.   The method of any one of claims 41 to 45, wherein
the selected mobile stations are mobile stations which
have previously participated in a call routed through
the base station or stations associated with the
location data cache.

47.   The method of any one of claims 41 to 46,
comprising storing, when a call is routed through a base
station, location data for both the calling and called
mobile stations in a location data cache associated that
base station.

48.   The method of any one of claims 41 to 47, wherein
the location data cache stores only a predetermined
number of location records.

49.   The method of any one of claims 41 to 48, wherein
the location data stored in the location data cache is
the last known location of the selected mobile station.

50.   The method of any one of claims 41 to 49, wherein
additional non-location data for each selected mobile
station is stored in the location data cache

51.   The method of any one of claims 41 to 50, wherein
each location data cache stores the next location of a
selected mobile station when that mobile station has
moved from a base station associated with the location
data cache.

52.   The method of any one of claims 41 to 51, wherein
location data for a mobile station stored in a location

- 44 -

data cache is only updated when that mobile station
communicates through a base station associated with the
location data cache

53. The method of any one of claims 41 to 52, wherein
the location data store contains a location data record
for each mobile station capable of communicating in the
network and which is updated with the location of a
mobile station each time the mobile station registers
with a new base station.

54. The method of any one of claims 41 to 53, wherein
there are a plurality of location data stores, and each
location data store contains a location data record for
at least one, but less than all mobile stations capable
of using the network.

55. The method of claim 54, further comprising storing
index data associating each mobile station with a
location data store containing the location data record
for that mobile station in an index data store.

56. A method of operating a radio communications
network, the network comprising a plurality of base
stations arranged for wireless communication with a
plurality of mobile stations, the method comprising:
        providing a plurality of location data stores, each
location data store containing a location data record
for at least one, but less than all mobile stations
capable of using the network; and
        providing an index data store containing index data
associating each mobile station with a location data
store containing the location data record for that
mobile station.

57. The method of claim 55 or claim 56, wherein the
index data store is a central database containing index

data for all mobile stations in the network and is
accessible by all base stations.

58.   The method of any one of claims 55 to 57, wherein
there are a plurality of index data stores, each index
store containing index data for all mobile stations in
the network.

59.   The method of any one of claims 55 to 58, further
comprising storing index data for selected mobile
stations in a plurality of index data caches which are
accessible by the base stations, such that each base
station can access such an index data cache.

60.   The method of claim 59, wherein each base station
has its own index data cache.

61.   The method of claim 59 or claim 60, wherein the
selected mobile stations in the index data cache are the
stations the location data of which is stored in the
location data cache for the same base station or
stations.

62.   The method of any one of claims 59 to 61, wherein
additional data for each mobile station is stored in the
index data cache.

63.   The method of any one of claim 59 to 62, wherein
each base station is provided with a single data cache
for both index data and location data.

64.   The method of any one of claims 59 to 63, wherein
each base station is provided with a database which
includes a location data store and a data cache for both
index data and location data.

65.   The method of any one of claims 54 to 64, wherein

- 46 -

each location data store is associated with a base
station of the network.

66. The method of any one of claims 54 to 64, wherein
the location data stores are located at junctions or
switching units of the network.

67. The method of any one of claims 41 to 66, further
comprising each base station, when it receives a request
for a call to a mobile station that is no longer served
by that base station, forwarding the call request to the
base station at the location indicated by the location
data for the called mobile station in the location data
cache of the base station or, if no such location data
is stored in the location data cache associated with the
base station, forwarding the call request to the
location data store.

68. The method of any one of claims 41 to 67, further
comprising the location data store, if it receives a
request for a call to a mobile station from a base
station, forwarding the call request to the base station
at the location indicated by the location data stored
for the mobile station in the location data store.

69. The method of any one of claims 41 to 68, further
comprising the index data store, when it receives a call
request for a particular mobile station, supplementing
the call request with the identity of the location data
store storing the location data record for the called
mobile station and forwarding the call request to that
location data store.

70. The method of any of one of claims 41 to 69,
further comprising each index data cache forwarding a
call request for a mobile station to the location data
store indicated as containing the location data record

for the called mobile station by the index data stored
in the index data cache, and if the index data cache
contains no index data for the called mobile station,
forwarding the call request to the index data store.

71. The method of any one of claims 67 to 70, wherein a
call request that has been forwarded a predetermined
number of times is forwarded to a location data store.

72. A method of operating a radio communications
network, the method comprising storing calling data
relating to at least some of the mobile stations capable
of communicating via the network in a database, sending
a call request to the database and forwarding the call
request, supplemented if possible with calling data from
the database, in response to the calling data stored in
the database in order to progress the call request
through the network.

73. A method of operating a database of a radio
communications network, the method comprising storing in
the database calling data relating to at least some of
the mobile stations capable of communicating via the
network, receiving a call request and forwarding the
call request, supplemented if possible with calling data
from the database, in response to the calling data
stored in the database in order to progress the call
request through the network.

74. The method of claim 72 or claim 73, wherein the
calling data is location data and the database is a
location data cache.

75. The method of any one of claims 41 to 74, wherein
some of the mobile stations of the network are arranged
in predetermined call groups, each call group including
two or more mobile stations, further comprising storing

a location data record for each call group which group
location data record contains the location of each of
the members of the call group.

76. The method of claim 75, wherein an index data
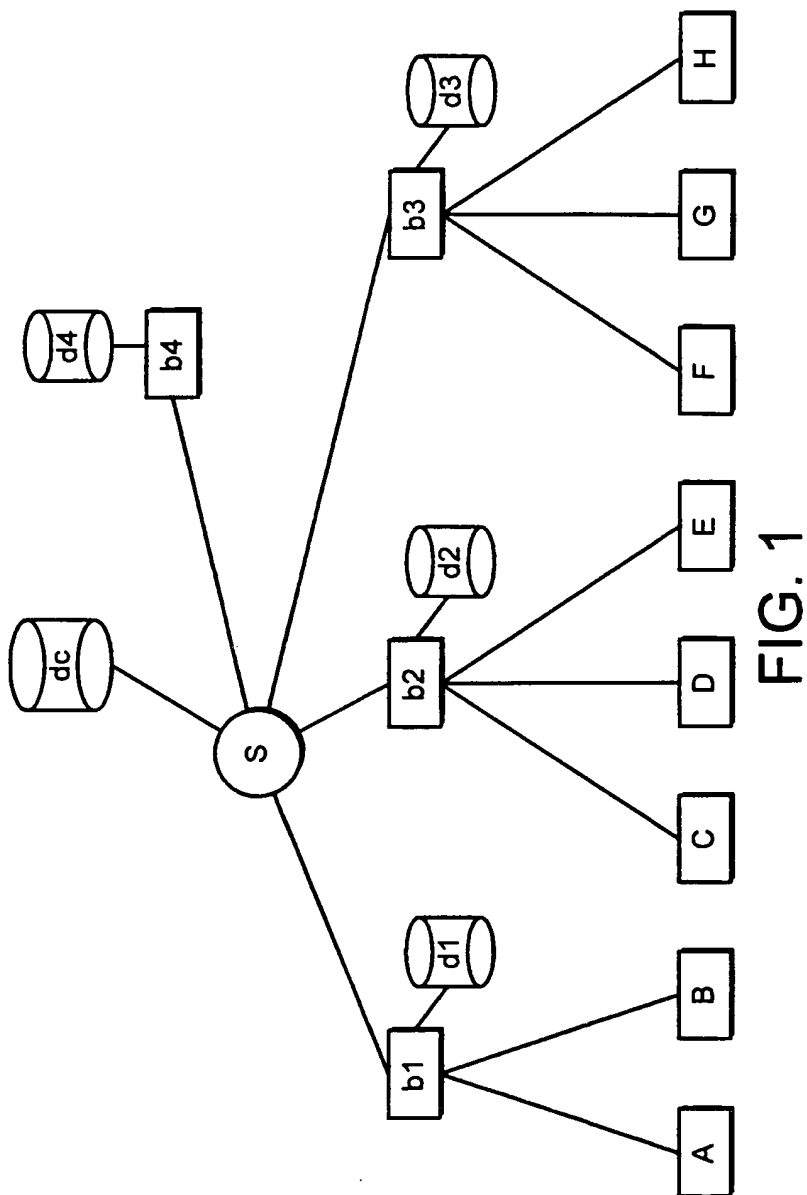record is stored in the index data store for each call
group.

77. The method of claim 75 or 76, wherein there is
further stored for each mobile station a group data
record which indicates the call group membership of the
mobile station.

78. The method of claim 75, 76 or 77, further
comprising, when a mobile station registers with a base
station, updating the location data records for all call
groups of which that mobile station is a member to
indicate that a member of the appropriate call group is
located at that base station.

79. The method of claim 75, 76, 77 or 78, further
comprising, when a mobile station registers with a base
station, transmitting the location data for any call
group of which that mobile station is a member to the
location data cache of each base station where the
location data record for the group indicates that a
member of the group is currently located.

80. A method of operating a base station of a radio
communications network, the method comprising storing
location data for selected mobile stations capable of
communicating via the network at the base station and
requesting location data from a location data store in
the event that location data is required by the base
station for a mobile station that is not one of the
selected mobile stations.

81. A method of operating a radio communications network, the network comprising a plurality of base stations arranged for wireless communication with a plurality of mobile stations, the mobile stations comprising at least one talk group, wherein each base station with which a member of the talk group is registered is provided with a continually updated list of the base stations with which the other members of the talk group are registered.

82. A radio communications network substantially as described with reference to the accompanying drawings.

83. A database for a radio communications network substantially as described with reference to the accompanying drawings.

84. A base station for a radio communications network substantially as described with reference to the accompanying drawings.

85. A method for operating a radio communications network substantially as described with reference to the accompanying drawings.

86. A method of operating a database of a radio communications system substantially as described with reference to the accompanying drawings.

87. A method of operating a base station of a radio communications system substantially as described with reference to the accompanying drawings.
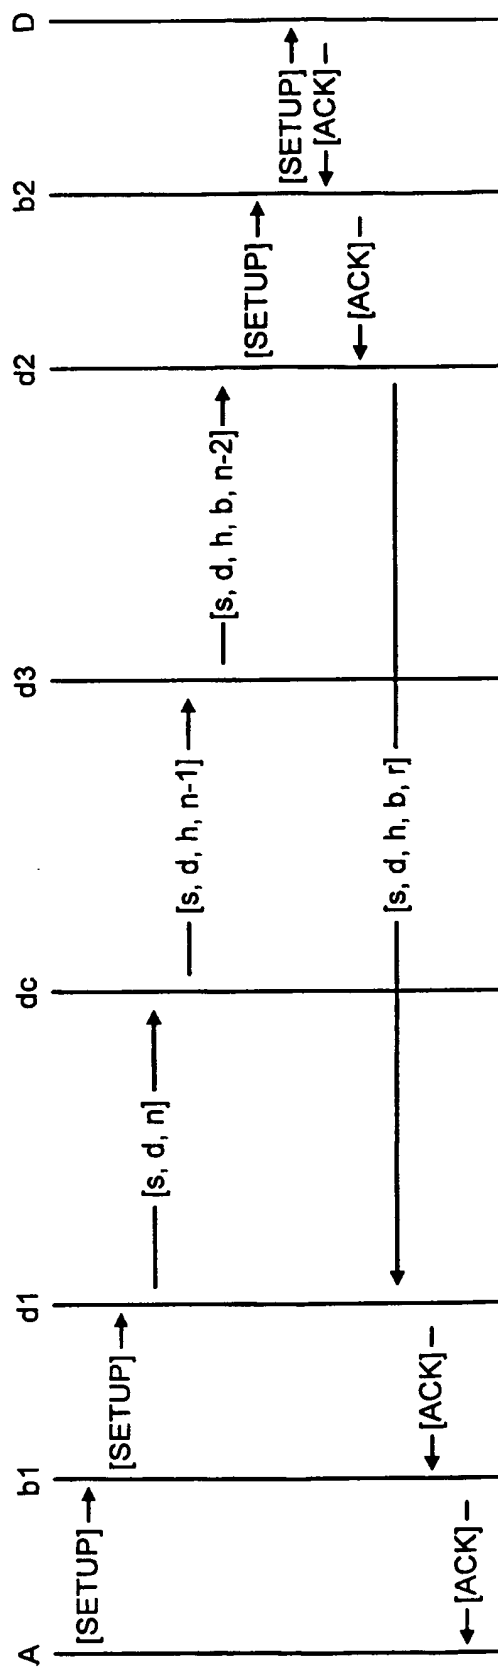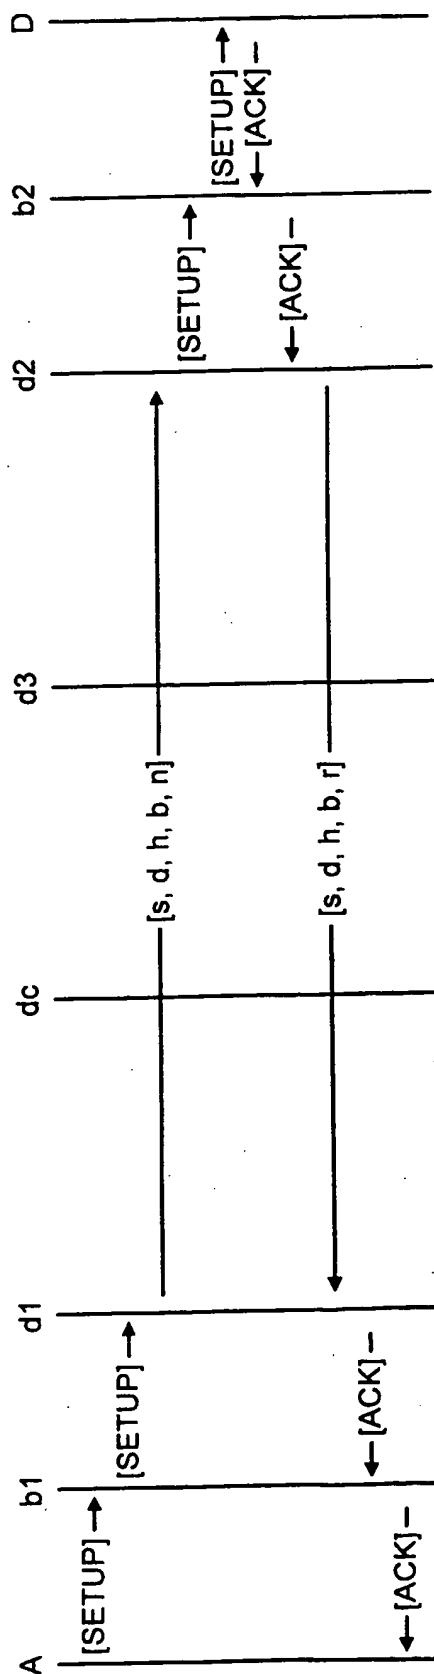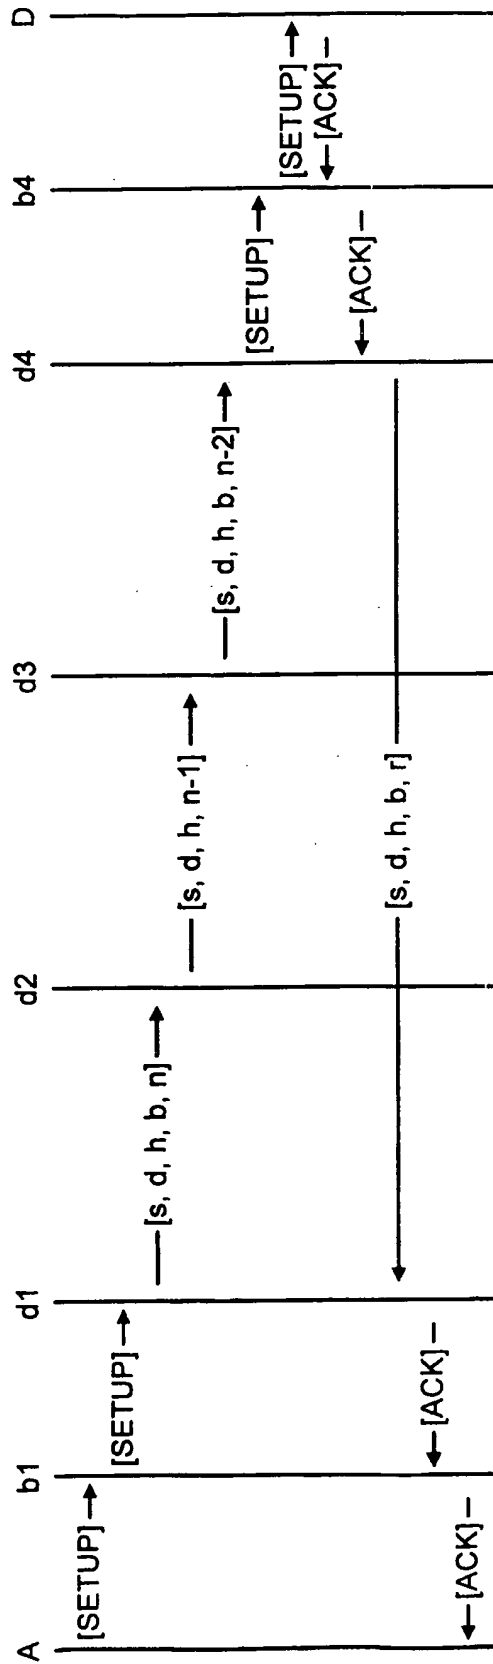
FIG. 1

FIG. 2

FIG. 3

FIG. 4